


# Are you taking the best slack back to your fleet?

Many slacks on the market over adjust – which causes dragging brakes and costs you money.

Get up to 16% more lining life, and 30% more drum life with Bendix® Versajust®.

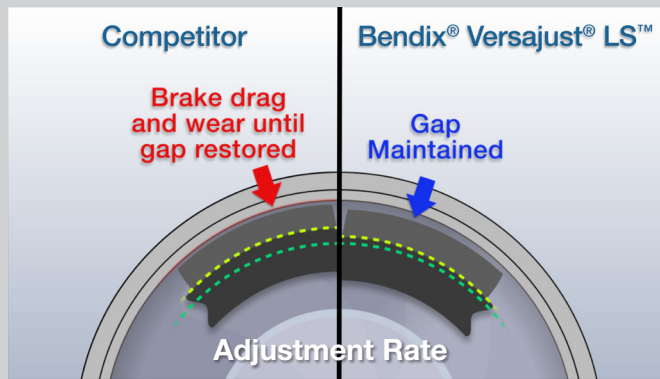


## Routinely backing off slacks is not normal.

That's wasted labor and could be a sign of over-adjustment. With a gradual and precise adjustment rate, the Bendix Versajust slack maintains running clearance and reduces the likelihood of dragging brakes.

## You may be wasting fuel, drums, and linings.

Over-adjusting slacks cause dragging brakes. To create running clearance, you'll wear away at linings and drums – and consume extra fuel. The right slack can actually extend lining and drum life – that's Bendix Versajust.

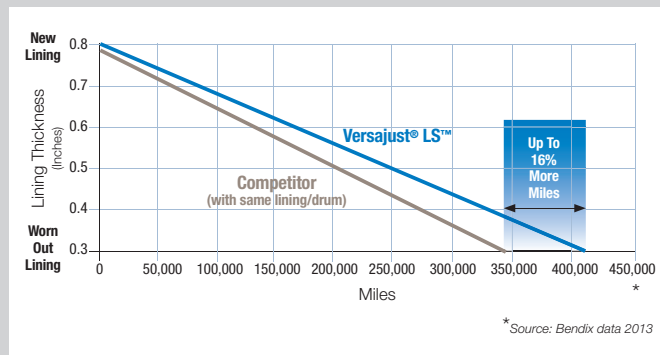

## Bendix® Versajust® Slack Adjuster



The best slack for your fleet is Bendix Versajust. Make the switch today.

Designed for universal fit, the Bendix® Versajust® LS™ Slack Adjuster can replace just about any other slack adjuster\*

Stemco-Crewsun non Auto-Check	Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
MK21100S	K041870	5.5	1.50" - 10	E0*	5/8"
MK21106S	K041876	6.0	1.50" - 10	E0	5/8"
MK21300S	K102424	5.5	1.50" - 10	E0- 5/8 Offset	1/2"
MK22100S	K043197	5.5	1.50" - 28	E0	5/8"
MK22106S	K041877	6.0	1.50" - 28	E0	5/8"
MK22300S	K102427	5.5	1.50" - 28	E0- 5/8 Offset	5/8"
MK23100S	K102369	5.5	1.63" - 37	E0	5/8"
MK23106S	K102371	6.0	1.63" - 37	E0	5/8"
MK24300S	K102277	5.5	1.25" - 10	E0- 5/8 Offset	5/8"
MK24400S	K102422	5.5	1.25" - 10	E0- 5/8 Offset	1/2"
MK25400S	K102423	5.5	1.25" - 24	E0- 5/8 Offset	1/2"

Haldex® AA-1	Haldex® SABA	Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
40010002 L		K102277	5.5	1.25" - 10	E0- 5/8 Offset	5/8"
40010003 R						
40010002 L		K102422	5.5	1.25" - 10	E0- 5/8 Offset	1/2"
40010003 R						
40010040 L		K102423	5.5	1.25" - 24	E0- 5/8 Offset	1/2"
40010041 R						
40010071	40020236	K041870	5.5	1.50" - 10	E0	5/8"
40010072	40020235	K041871	5.5	1.25" - 10	E0	1/2"
40010073		K051512	5.5	1.25" - 24	E0	5/8"
40010140	40020234	K041877	6.0	1.50" - 28	E0	5/8"
40010140	40020234	K047150	5.0	1.50" - 28	E0	5/8"
40010141	40020231	K043197	5.5	1.50" - 28	E0	5/8"
40010141	40020231	K102427	5.5	1.50" - 28	E0- 5/8 Offset	5/8"
40010142	40020233	K041876	6.0	1.50" - 10	E0	5/8"
40010142	40020233	K050079	5.0	1.50" - 10	E0	5/8"
40010143	40020236	K041870	5.5	1.50" - 10	E0	5/8"
40010208	40020214	K102371	6.0	1.63" - 37	E0	5/8"
40010213	40020213	K102369	5.5	1.63" - 37	E0	5/8"
40010214	40020214	K102371	6.0	1.63" - 37	E0	5/8"

Gunite			Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
With 1.0 Clevis	Gunite 2000	W/O Clevis					
AS1131		AS1031	K050079	5	1.50" - 10	E0	5/8"
AS1132	AS1168	AS1032	K041870	5.5	1.50" - 10	E0	5/8"
AS1133	AS1169	AS1033	K041876	6.0	1.50" - 10	E0	5/8"
AS1136	AS1170	AS1036	K041871	5.5	1.25" - 10	E0	1/2"
AS1137		AS1037	K046175	5.0	1.25" - 24	E0	1/2"
AS1138	AS11171	AS1038	K051512	5.5	1.25" - 24	E0	5/8"
AS1139		AS1039	K047150	5.0	1.50" - 28	E0	5/8"
AS1140	AS1172	AS1040	K043197	5.5	1.50" - 28	E0	5/8"
AS1141	AS1173	AS1041	K041877	6.0	1.50" - 28	E0	5/8"
AS1143		AS1043	K102369	5.5	1.63" - 37	E0	5/8"
AS1144		AS1044	K102371	6.0	1.63" - 37	E0	5/8"
AS1152		AS1052	K102422	5.5	1.25" - 10	E0- 5/8 Offset	1/2"
AS1153		AS1053	K102277	5.5	1.25" - 10	E0- 5/8 Offset	5/8"
AS1154		AS1054	K102423	5.5	1.25" - 24	E0- 5/8 Offset	1/2"
AS1156		AS1056	K102425	5.5	1.50" - 10	E0- 5/8 Offset	5/8"
AS1157		AS1057	K102427	5.5	1.50" - 28	E0- 5/8 Offset	5/8"

\* Easy On Yoke

The above detail is provided for reference only. All parts listed should be verified before use for each individual brake system application or vehicle.

